


# SS42-250, 500 & 1000 316 STAINLESS STEEL DAVIT CRANES

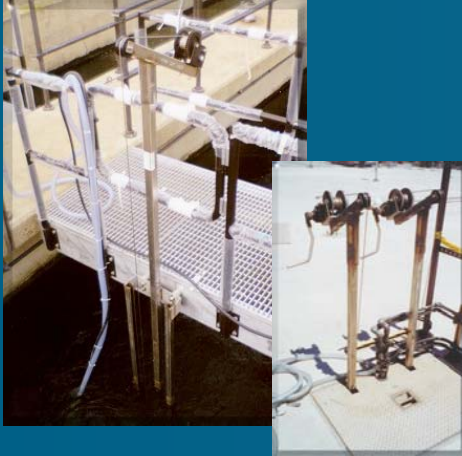

## SS42-250 316 S.S. INTEGRAL DAVIT CRANE

The SS42-250 integral davit crane is rated for up to 1000 lb. load capacity and designed for applications where walkway space is minimal, fiberglass or aluminum walkways that can not support floor socket bases, or narrow channels where a long boom reach is not required. The 2" square tube backbone of the guide rail extends to form the davit crane mast above grade level. The top mounted socket slides over the mast forming the davit crane. The top socket boom rotates 360 degrees for ease in installing or removing a CIU for maintenance inspection.

The crane mast, boom, and socket are constructed of 316 stainless steel. The spur gear winch with brake for load control is rated for 1,000 lb. lifting operation. Winch options include zinc plated or 304 stainless steel.



## SS42-500 316 S.S. PORTABLE DAVIT CRANE

The SS42-500 portable davit crane is rated for up to 500 lb. load capacity. The crane is supplied with a pedestal base for flush or side wall mounting. The crane rotates 360 degrees for ease in installing or removing a CIU. Adjustable boom angle and extension provides the reach needed for wide channel installations.

The crane mast, boom, and socket are constructed of 316 stainless steel. The spur gear winch with brake for load control is rated for 1,000 lb. lifting operation. Winch options include zinc plated or 304 stainless steel.

316 stainless steel 1/4" wire rope lifting cable and eye clip are standard with each winch.



## SS42-1000 316 S.S. DAVIT CRANE

The SS42-1000 davit crane is used with heavy submersible series 32, 32PT, and 32XP chemical induction units or for applications requiring an extra long boom reach. The boom rotates 360 degrees for ease in installing or removing a CIU.

The crane is supplied with a pedestal base for flush or side wall mounting. Adjustable boom angle and extension provides the reach needed for wide channel installations.

The crane mast, boom, and base are constructed of 316 stainless steel. The 304 stainless steel spur gear winch with brake for load control is rated for 1,000 lb. lifting operation. 316 stainless steel 1/4" wire rope lifting cable and eye clip are standard with each winch.

The SS42-250, 500, & 1000 are proudly made in the U.S.A. and is backed by a 1 year limited warranty.



**MAKING A WORLD OF DIFFERENCE IN CHEMICAL FEED TECHNOLOGY**  
1-800-299-6836 [www.gasmastrrr.com](http://www.gasmastrrr.com) [mastrrrsales@gmail.com](mailto:mastrrrsales@gmail.com)